

WEEE Number: 80133970

INSTRUCTION MANUAL LED FLOOD LIGHT WITH SOLAR PANEL

TECHNICAL DATA

MODEL	VT-55W	VT-102W
SKU	23438	23439
LUMEN	1000Lm	1800Lm
SOLAR PANEL	10W	15W
COLOR TEMPERATURE	4000K	4000K
DC VOLTAGE	6V	6V
CHARGING TIME	6-8H	6-8H
WORKING TIME	12H	12H
BATTERY	3.7V, 8000mAh	3.7V, 12000mAh
BATTERY TYPE	21700 Lithium Iron Phosphate Battery	21700 Lithium Iron Phosphate Battery
OPERATION TEMPERATURÈ	-10°C to +50°C	-10°C to +50°C
SOLAR PANEL COLOR	BLACK	BLACK
FLOOD LIGHT DIMENSION	191x241x73mm	191x241x73mm
SOLAR PANEL DIMENSION	210x340mm	390x230mm



3 METER WIRE 1P65 02 RATING WARRANTY*

REPLACEABLE BATTERY



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.


INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING

- Please make sure to turn off the power before starting the installation.
- Installation should only be done by a certified electrician.
- The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

PACKAGE CONTENT

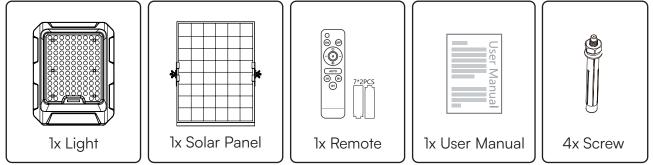


FR


Points de collecte sur www.quefai Privilégiez la réparation ou le don

Cet appareil, ses accessoires, cordons et batteries se recvd

REMOTE INSTRUCTIONS

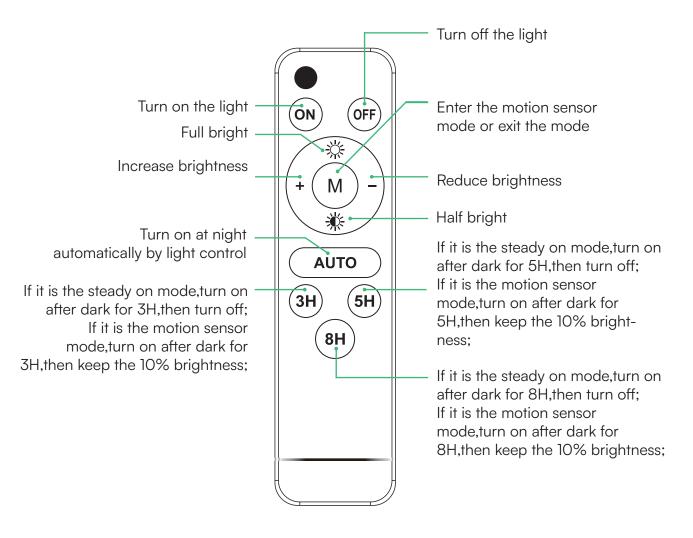

INSTALLATION DIAGRAM

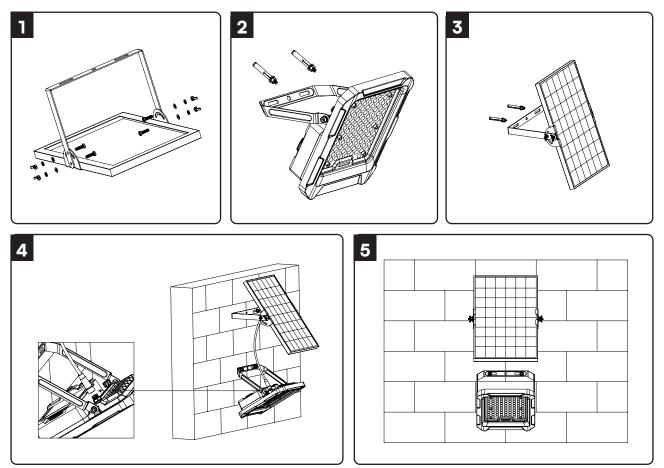


INSTALLATION INSTRUCTIONS


- Install the solar panel bracket.
- Locate and fix the floodlight.
- Locate and fix the solar panel, adjusting the solar panel in a proper angle and make sure it can get the sunlight directly in a long time.
- Connect the cable between floodlight and solar panel, make sure its connected tightly.
- Use the remote controller to try and make sure it can work well.

ADDITIONAL INSTRUCTIONS

A. Batterry replacement

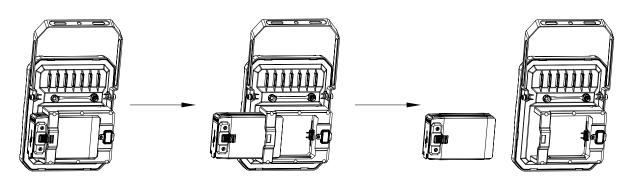

B. Type USB-C input/ USB Output

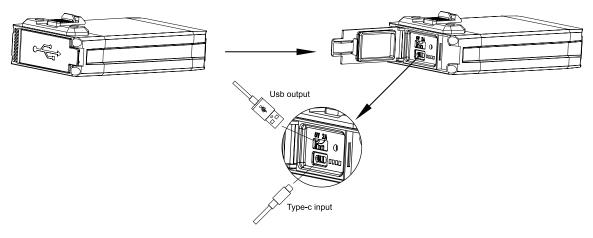

MAINTENANCE & WARNING

- Do not use solvents, petrol, etc. Otherwise the light will be damaged.
- Clean the light with a dry, lint-free cloth.
- Check the solar panel for dirt regularly. If dirt or is present remove it to guarantee flawless function of the product.
- Especially during the winter, keep the product free from snow and ice.
- Confirm installation direction is correct (solar panel should be at top).
- Confirm no objects blocking the solar panel to receive sunlight.
- Keep away from the fire.
- Don't immerse in the water.

